

Sawing ... only with MADO.  
SELEKTA and PERFEKTA PLUS  
are showing teeth.



for the best

# SELEKTA and PERFEKTA PLUS

## band saws with and without sliding table.

Experience and fully developed technology are the guarantee for the best work results with band saws from MADO. Know-how developed over decades as well as constant dialog with our customers and the application and realization of the latest development results are indispensable for the common success.

Band saws of MADO have been consistently designed for the needs of the butcher trade, meat products industry, meat dissecting plants, multiple chain stores or canteen kitchens. With eight different variants MADO offers solutions for every choice and area of application.

All MADO band saws have been manufactured from high-grade stainless steel based on the latest developments for efficient, hygienic food processing. They cut everything exactly in clean sections, irrespective of whether it is meat, bone, poultry or fish. All models have the required safety equipment such as pressure device, vertically adjustable band protection, solenoid operated door switch and motor brake.



SELEKTA  
MKB 754

MADO band saws, with their ergonomic and advanced design, can be easily and hygienically cleaned with the high pressure cleaner.

For the model ranges SELEKTA 2, SELEKTA 3 and SELEKTA 4 various special equipment is available:

Fixed and sliding tables in several sizes, reinforced band tension and band guide as well as different motor speeds for all kinds of raw material. The sliding table models with heavy-duty ball bearings and exact operation are suitable for the hardest industrial application.

■ **Stability**

■ **Quiet operation**

■ **Safety**

■ **Hygiene**



SELEKTA  
MKB 754

# SELEKTA 4 Industry band saw with roller or fixed table.

The SELEKTA 4 band saw is consistently designed for the requirements of the industry. The machine is ideal for the professional operation in meat dissecting plants as well as the meat products industry. She is available with roller or fixed table.

The SELEKTA 4 has been manufactured from high –grade stainless steel based on the latest developments for efficient, hygienic food processing. She can be easily cleaned with a high pressure cleaner. The curling elements can be removed for cleaning and can be discarded on a cleaning device. This reduces the efforts when cleaning the machine.



The SELEKTA 4 is available: with various special equipment reinforced band tension and band guide as well as different motor speeds for all kinds of raw material.

The SELEKTA 4 band saw contains the required safety equipment such as pressure device, vertically adjustable band protection, solenoid operated door switch and motor brake.

SELEKTA  
MKB 758

Through the robust construction the SELEKTA 4 band saw MKB 757, MKB 758 is for the hardest industrial operation.

- Stability
- Quiet operation
- Safety
- Hygiene



SELEKTA  
MKB 758

Band saws with fixed table. Especially manufactured for the butcher trade, chain stores and the catering trade. They particularly distinguish themselves due to their versatility and cut everything exactly in clean sections. Irrespective of whether bones, cutlets, rib pieces, frozen meat, ham, bacon or fish.

- Stability
- Quiet operation
- Safety
- Hygiene





PERFEKTA PLUS  
MKB 649





SELEKTA  
MKB 750



## MKB 649

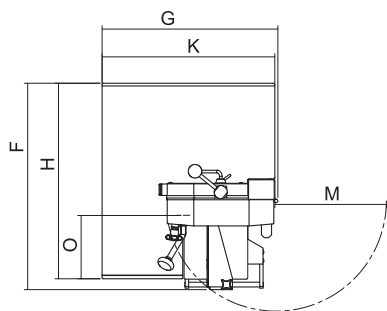

## MKB 750-754

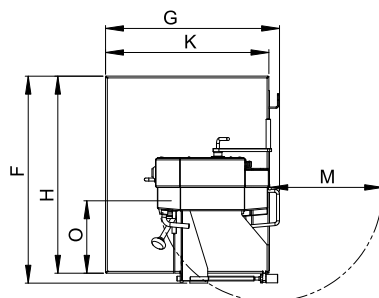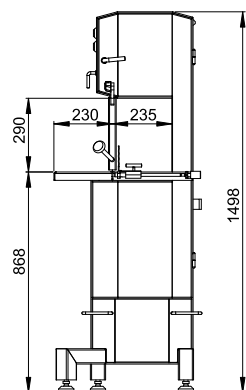

## MKB 757-758

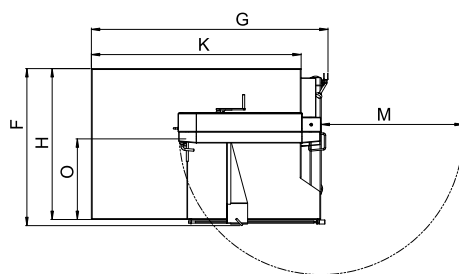

### PERFEKTA-PLUS MKB 649

Cut opening approx. 200 mm

### SELEKTA MKB 750

Cut opening approx. 250 mm

### SELEKTA 2 MKB 751

Cut opening approx. 300 mm

### SELEKTA 2 MKB 752

Cut opening approx. 300 mm

### SELEKTA 3 MKB 753

Cut opening approx. 400 mm

### SELEKTA 3 MKB 754

Cut opening approx. 400 mm

### SELEKTA 4 MKB 757

Cut opening approx. 485 mm

### SELEKTA 4 MKB 758

Cut opening approx. 485 mm




| Type                | MKB 649 D                      | MKB 649 W                      | MKB 750                        | MKB 751                        | MKB 752                        | MKB 753                        | MKB 754                        | MKB 757                        | MKB 758                        |
|---------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| A                   | 373 mm                         | 373 mm                         | 900 mm                         | 900 mm                         | 900 mm                         | 900 mm                         | 900 mm                         | 960 mm                         | 960 mm                         |
| B                   | 233 mm                         | 233 mm                         | max. 290 mm                    | 340 mm                         | 340 mm                         | 410 mm                         | 410 mm                         | 525 mm                         | 525 mm                         |
| C                   | 960 mm                         | 960 mm                         | 1530 mm                        | 1640 mm                        | 1640 mm                        | 1800 mm                        | 1800 mm                        | 2065 mm                        | 2065 mm                        |
| D                   | 220 mm                         | 220 mm                         | 230 mm                         | 325 mm                         | 362 mm                         | 400 mm                         | 436 mm                         | 690 mm                         | 690 mm                         |
| E                   | 190 mm                         | 190 mm                         | 235 mm                         | 280 mm                         | 280 mm                         | 400 mm                         | 400 mm                         | 815 mm                         | 815 mm                         |
| F                   | 556 mm                         | 556 mm                         | 693 mm                         | 831 mm                         | 850 mm                         | 887 mm                         | 908 mm                         | 1060 mm                        | 1060 mm                        |
| G                   | 190 mm                         | 190 mm                         | 583 mm                         | 724 mm                         | 762 mm                         | 944 mm                         | 980 mm                         | 1675 mm                        | 1675 mm                        |
| H                   | 490 mm                         | 490 mm                         | 660 mm                         | 798 mm                         | 798 mm                         | 854 mm                         | 853 mm                         | 1010 mm                        | 1020 mm                        |
| K                   | -                              | -                              | 547 mm                         | 688 mm                         | 721 mm                         | 910 mm                         | 946 mm                         | 1485 mm                        | 1485 mm                        |
| L                   | -                              | -                              | -                              | -                              | 371 mm                         | -                              | 397 mm                         | -                              | -                              |
| M                   | -                              | -                              | 377 mm                         | 430 mm                         | 430 mm                         | 571 mm                         | 571 mm                         | 1010 mm                        | 1010 mm                        |
| O                   | -                              | -                              | 238 mm                         | 320 mm                         | 320 mm                         | 375 mm                         | 375 mm                         | 567 mm                         | 567 mm                         |
| Current type        | 400 V, 50 Hz three-phase curr. | 230 V, 50 Hz alternating curr. | 400 V, 50 Hz three-phase curr. | 400 V, 50 Hz three-phase curr. | 400 V, 50 Hz three-phase curr. | 400 V, 50 Hz three-phase curr. | 400 V, 50 Hz three-phase curr. | 400 V, 50 Hz three-phase curr. | 400 V, 50 Hz three-phase curr. |
| Motor capacity      | 1,1 kW                         | 0,9 kW                         | 1,1kW                          | 1,5 kW                         | 1,5 kW                         | 2,2 kW                         | 2,2 kW                         | 2,2,kW                         | 2,2,kW                         |
| Fuse protection     | 16 A inert                     | 16 A inert                     | 16 A inert                     | 16 A inert                     | 16 A inert                     | 16 A inert                     | 16 A inert                     | 16 A inert                     | 16 A inert                     |
| Revolution per min. | 1400 rpm                       | 1400 rpm                       | 1410 rpm                       | 1450 rpm                       | 1450 rpm                       | 980 rpm                        | 950 rpm                        | 920 rpm                        | 920 rpm                        |
| Cutting speed       | 17 m/sec.                      | 17 m/sec.                      | 17 m/sec.                      | 22 m/sec.                      | 22 m/sec.                      | 22 m/sec.                      | 22 m/sec.                      | 22 m/sec.                      | 22 m/sec.                      |
| Saw band dimensions | 1750x16x 0,45 mm               | 1750x16x 0,45 mm               | 2170x16x 0,45 mm               | 2430x16x 0,45 mm               | 2430x16x 0,45 mm               | 3150x16x 0,45 mm               | 3150x16x 0,45 mm               | 4115x16x 0,6 mm                | 4115x16x 0,6 mm                |
| Weight              | approx. 60 kg                  | approx. 60 kg                  | approx. 120 kg                 | approx. 170 kg                 | approx. 200 kg                 | approx. 200 kg                 | approx. 225 kg                 | approx. 400 kg                 | approx. 400 kg                 |


# Special machines for modern meat processing.



- Meat grinders
- Bowl choppers



- Band saws
- Knife sharpeners



- Mixers
- Portioning systems
- Industrial machines



MADO machines comply with the EC Machine Norms. They are marked with the CE sign. MADO is certified according to DIN ISO 9001.



Special voltages on enquiry. Technical changes made during the course of further development are reserved.



MADO special machines for modern meat processing at qualified specialists.

**MADO GmbH**  
 Balmerstraße 10  
 72175 Dornhan/Schwarzwald  
 Germany  
 Telefon +49 (0) 74 55 93 1-0  
 Telefax +49 (0) 74 55 22 63  
<http://www.mado.de>  
 E-mail: [info@mado.de](mailto:info@mado.de)



**for the best**